


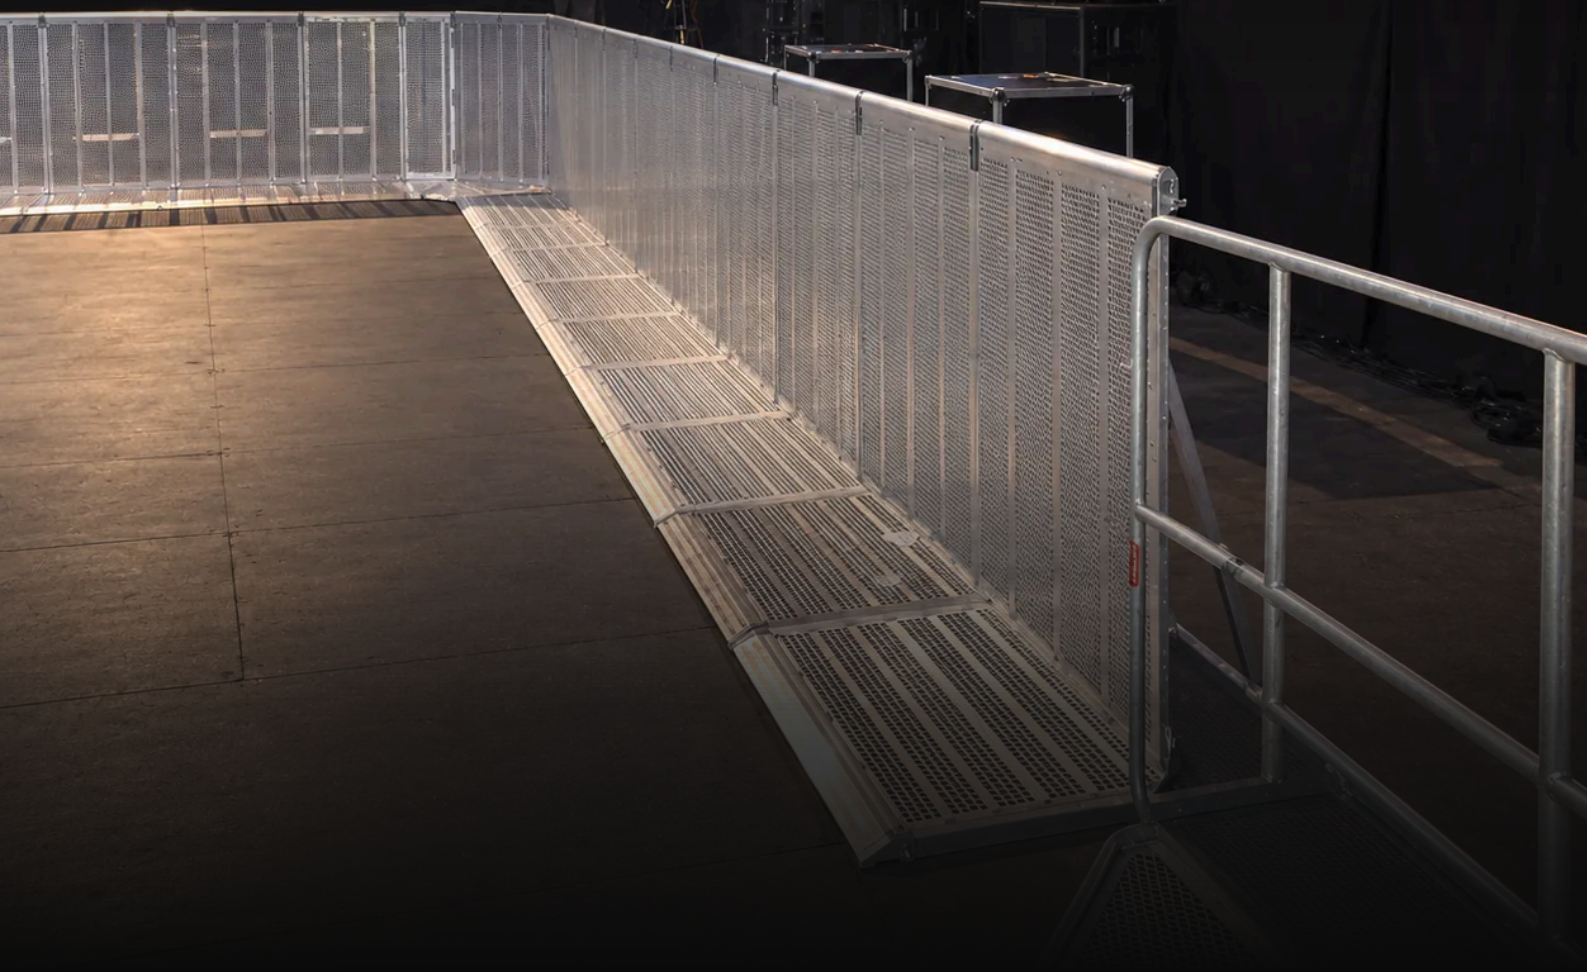

MOJO BARRIERS · SPECIAL SYSTEMS

Security Features

Sight screen · security walkway · wedge

MOJO BARRIERS — PRODUCT DATA SHEET

Security Features

Three additions extend the Mojo barrier line. A sight screen blocks the view at chosen points, a security walkway gives staff a raised rear platform and wedges curve the line around a stage.

1.20 m

PANEL HEIGHT

1.00 m

WALKWAY WIDTH

5.5°

WEDGE ANGLE


7.66 kN/m

TESTED LOAD, 2011
SPECIMEN

01

SIGHT SCREEN / SIGHTLINE KILLS

A sight screen, also known as 'sightline kills', consists of 1.20 m high panels on top of the barrier line. The panels are placed at chosen points and are intended to block the view there, for instance at entrances, exits and the sides of stage areas.

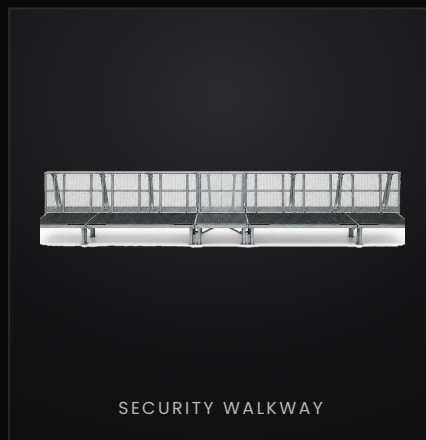

02

SECURITY WALKWAY

The security walkway is a continuous system at the back of the barrier line, corners included. Instead of the regular rear steps alone, it forms a raised working platform, 1.00 m wide and without gaps. Security and medical staff gain a better view of the audience and better access.

03

5.5° WEDGE

Wedges are narrow fixed corner sections of 5.5°, approx. 0.49 m wide and 1.25 m deep. They curve the whole barrier line gradually, for instance in front of a large stage. Wedges have a double brace and no rear step. They connect to the adjoining sections; connection details vary by production series.

TECHNICAL SPECS — SECURITY FEATURES

	SIGHT SCREEN	SECURITY WALKWAY	WEDGE 5.5°
Size	1.20 m high panels	1.00 m wide platform	approx. 0.49 m wide, 1.25 m deep
Position	on top of the barrier line	behind the barrier line, corners included	within the barrier line
Purpose	block the view at chosen points	view and access for security and medical staff	curve the line gradually
Details	–	raised, no gaps	fixed 5.5°, double brace, no rear step; connection details vary by series
Tested	–	–	Lloyd's British Testing 2011, 7.66 kN/m (test specimen)
Details can vary slightly between production series; your rental company will confirm the exact values.			

CERTIFICATION

WEDGE TESTED TO BS EN 13200-3

The 5.5° wedge of the Mojo Barrier® aluminium system was tested independently. Lloyd's British Testing report 030611-SB01 of 3 June 2011, to BS EN 13200-3:2005, records 7.66 kN/m against a required 5 kN/m, with no permanent set. The report applies only to the tested specimens named in it. Design details can differ between production series; your rental company will confirm which test documents apply to the units supplied.

Mojo Barriers BV develops its barrier systems and has had them independently tested since 1996. Certification is carried out by independent bodies such as TÜV NORD.

All test documents: mojobarriers.com/certification

GET IN TOUCH

Questions about this product

For product information, certification and data sheets, contact Mojo Barriers BV in Nieuwegein, the Netherlands.

Mojo Barriers BV

Groningenhaven 18-20
3433 PE Nieuwegein
Netherlands

TEL. +31 (0)30 242 82 00
EMAIL nl@mojorental.com
WEB mojobarriers.com

TO RENT

Rent Mojo barriers in your country

The MOJO Holding Group rents out Mojo barriers through its own companies. Contact the company in your country:

UNITED STATES

MOJO Rental North America
Manheim, PA
us@mojorental.com

UNITED KINGDOM

MOJO Rental UK Limited
Borough Green, Kent
uk@mojorental.com

NETHERLANDS

MOJO Rental All Areas
Nieuwegein
nl@mojorental.com

GERMANY

MOJO Rental Germany GmbH
Pyrbaum
germany@mojorental.com

CROATIA

MOJO Rental Southeast Europe
d.o.o.
Zagreb
kontakt@mojorental.hr

AUSTRALIA

NO FUSS Event Hire / MOJO Rental
Australia
Cranbourne West, VIC
info@nofusseventhire.com.au

Other countries and all contacts:

mojobarriers.com/where-to-rent

